


Glazing Details

| Guide Only Infill Panels for 1000mm High Lifeguard Balustrade | | | | | | | | |
|---|------------------------|------|------|------|-------------------|------|------|------|
| Design Load | Laminated Safety Glass | | | | Toughened Glass | | | |
| | 6mm | 8mm | 10mm | 12mm | 6mm | 8mm | 10mm | 12mm |
| | Maximum Span (mm) | | | | Maximum Span (mm) | | | |
| 0.5kPa | - | 1200 | 1400 | 1700 | 1200 | 1600 | 1700 | 1700 |
| 1.0kPa | - | - | 1000 | 1200 | - | 1300 | 1600 | 1700 |
| 1.5kPa | - | - | - | 1000 | - | 1100 | 1400 | 1700 |

Refer to structural engineer to confirm glass and spacings before purchasing any material.

| Guide Only Glazing Wedges | | |
|---------------------------|-----------|----------|
| A | B | Material |
| 6mm - 6.38mm | 04-335 | PVC |
| 8mm - 8.38mm | Wet Glaze | Silicone |
| 10mm - 10.38mm | Wet Glaze | Silicone |
| 12mm - 12.38mm | Wet Glaze | Silicone |

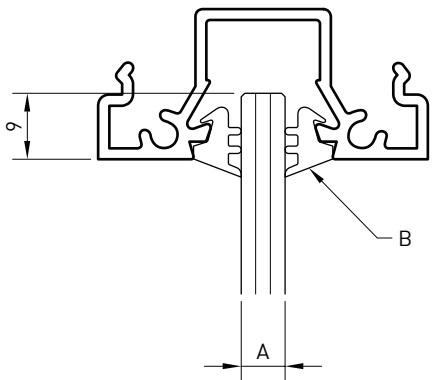

All glass to have ground or polished edges all around